



# SECOIA® 4487

Water-based bio-sourced alkyd

Wood impregnation

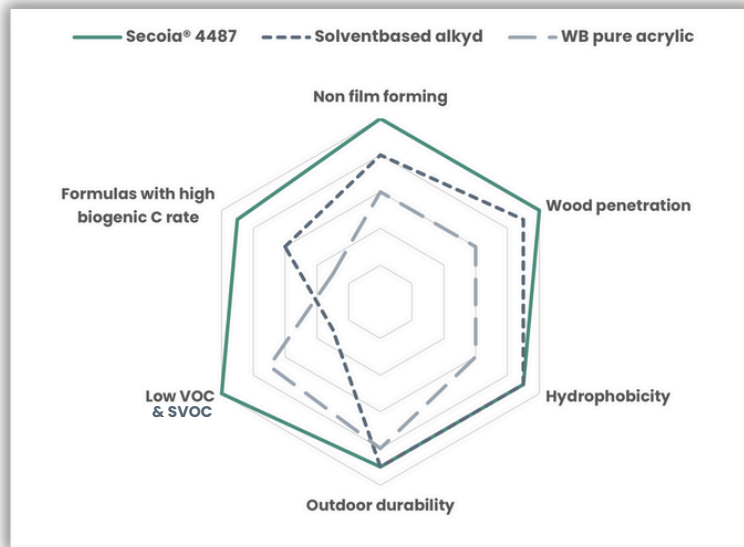

**Surfactant-free binder** to formulate **highly hydrophobic** wood impregnation products



\*Based on C content measured according to EN 16640

## The Pickering Technology

A clever alternative using **solid particles irreversibly absorbed at the water/oily phase interface to stabilize the dispersion.**

SECOIA® 4487




ACRYLIC BINDER



Pine wood – Brush application – 2 layers – 21 days of drying before immersion  
Pictures : after 4 days of immersion in distilled water

Nourishes wood while maintaining its natural appearance

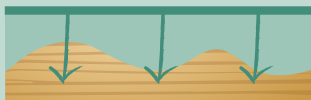

**Deep wood penetration** for good outdoor durability



**The bio-based binder to increase the biogenic carbon rate of decking oil**