

# INOKEM® UR 3308

Water-based modified polyurethane



\*Based on C content according to EN 16640

for wood care


## Key benefits in coatings:

- ✓ 40% solid content
- ✓ Low water uptake
- ✓ Gives wood a **natural look**
- ✓ Good **penetration** on hard-to-impregnate species (douglas, larch, etc.) and aged wood
- ✓ **High chemical resistance**
- ✓ Highly **flexible** and **hydrophobic**
- ✓ Good UV and weathering resistance



## Tests with wood floor oils:

### STAIN RESISTANCE

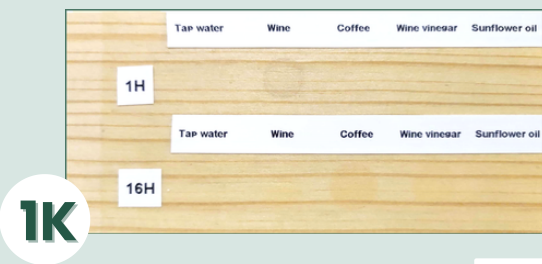

+5% EASAQUA™ X D 870



2K

### TANNIC BLOCKING



A performing balance between **impregnation** and **chemical resistance**

## QUV exposure tests\*\* on wood stains:



Its **versatility** allows it to be **used in combination** with **other INOKEM® UR** & polymers.

INOKEM® UR 3308 / Acrylic (67% / 33%)    Benchmark 1 Bio-based PU    Benchmark 2 Acrylic    Benchmark 3 Styrene-acrylic



\*\* According to NF EN 927-6